


Spectrum Test Report

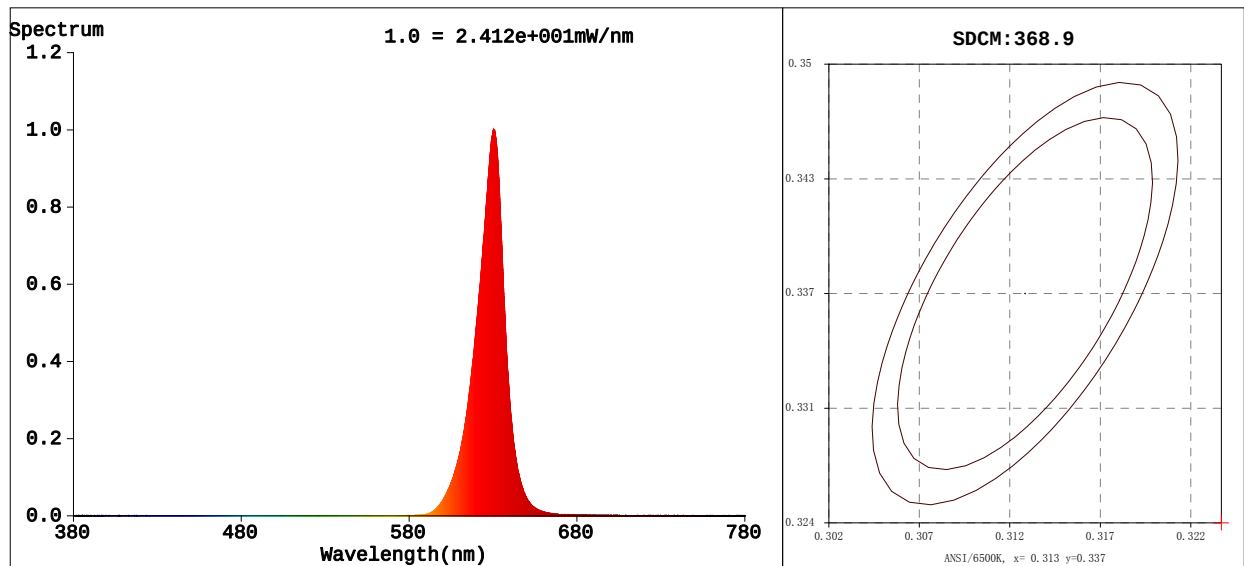

Colorimetric Parameters

Chromaticity Coordinate: $x=0.6953$ $y=0.3044$ $u'=0.5285$ $v'=0.5206$

CCT=1001K(Duv=-0.0810) Dominant WL:Ld =622.0nm Purity=99.9%

Peak WL:Lp=630.6nm FWHM=17.1nm

Render Index:Ra=24.4

R1 =2	R2 =78	R3 =25	R4 =0	R5 =0	R6 =90	R7 =0
R8 =0	R9 =0	R10=71	R11=0	R12=79	R13=27	R14=56
						R15=0

Photometric & Radiometric Parameters

Flux=100.5 lm Eff.:19.33 lm/W Fe=490.7 mW

Electrical parameters

V=24.00 V I=0.2166 A P=5.198 W PF=1.000 F=0.00 Hz

V=24.00 V I=0.2166 A P=5.198 W PF=1.000 F=0.00 Hz 频率=0.00 Hz


Status: Integral T = 242 ms Ip = 52734 (80%)

Test Mode: Fast Test; Sensitivity = High; Tecool: ON

Model:
Test By:ADMIN
Temperature:25.3Deg
Manufacturer:EVERFINE
Assessor:admin

Number:2
Date:2025-12-01 17:13:29
Humidity:65.0%
Remarks:---

Spectrum Test Report

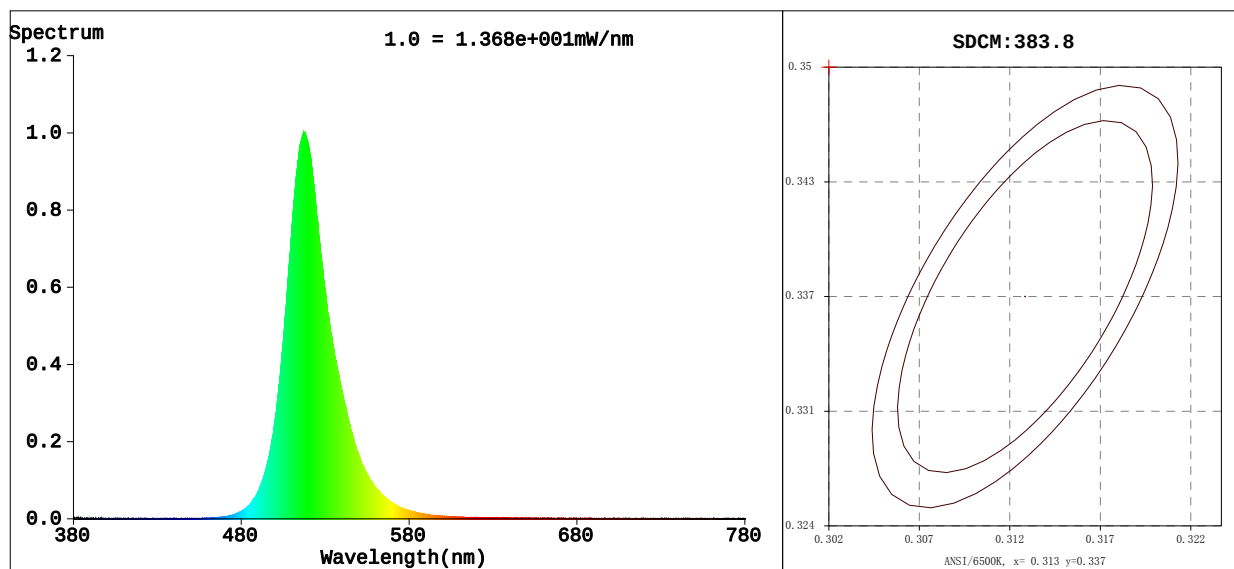

Colorimetric Parameters

Chromaticity Coordinate: $x=0.1493$ $y=0.7368$ $u'=0.0517$ $v'=0.5745$

CCT=8103K(Duv=0.1645) Dominant WL:Ld =524.2nm Purity=81.4%

Peak WL:Lp=517.1nm FWHM=27.2nm

Render Index:Ra=0.0

R1 =0	R2 =0	R3 =0	R4 =0	R5 =0	R6 =0	R7 =0
R8 =0	R9 =0	R10=0	R11=0	R12=0	R13=0	R14=33 R15=0

Photometric & Radiometric Parameters

Flux=214.9 lm Eff.:53.38 lm/W Fe=454.9 mW

Electrical parameters

V=24.00 V I=0.1678 A P=4.027 W PF=1.000 F=0.00 Hz

V=24.00 V I=0.1678 A P=4.027 W PF=1.000 F=0.00 Hz 频率=0.00 Hz


Status: Integral T = 343 ms Ip = 52278 (80%)

Test Mode: Fast Test; Sensitivity = High; Tecool: ON

Model:
Test By:ADMIN
Temperature:25.3Deg
Manufacturer:EVERFINE
Assessor:admin

Number:3
Date:2025-12-01 17:14:03
Humidity:65.0%
Remarks:---

Spectrum Test Report

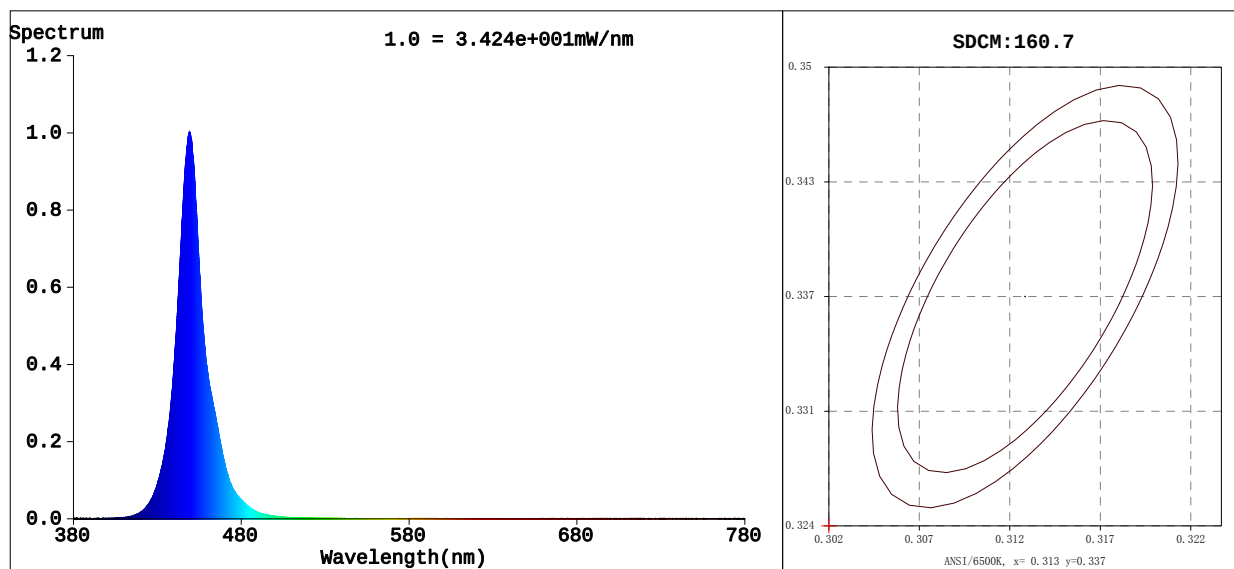

Colorimetric Parameters

Chromaticity Coordinate: $x=0.1540$ $y=0.0251$ $u'=0.2058$ $v'=0.0756$

CCT=10000K (Duv=-0.2170) Dominant WL:Ld =454.1nm Purity=98.9%

Peak WL:Lp=449.4nm FWHM=15.8nm

Render Index:Ra=0.7

R1 =0	R2 =0	R3 =0	R4 =0	R5 =6	R6 =0	R7 =0
R8 =0	R9 =0	R10=0	R11=0	R12=0	R13=0	R14=0 R15=5

Photometric & Radiometric Parameters

Flux=24.40 lm Eff.:7.23 lm/W Fe=716.9 mW

Electrical parameters

V=24.00 V I=0.1407 A P=3.377 W PF=1.000 F=0.00 Hz

V=24.00 V I=0.1407 A P=3.377 W PF=1.000 F=0.00 Hz 频率=0.00 Hz


Status: Integral T = 171 ms Ip = 44059 (67%)

Test Mode: Fast Test; Sensitivity = High; Tecool: ON

Model:
Test By:ADMIN
Temperature:25.3Deg
Manufacturer:EVERFINE
Assessor:admin

Number:4
Date:2025-12-01 17:14:30
Humidity:65.0%
Remarks:---

Spectrum Test Report

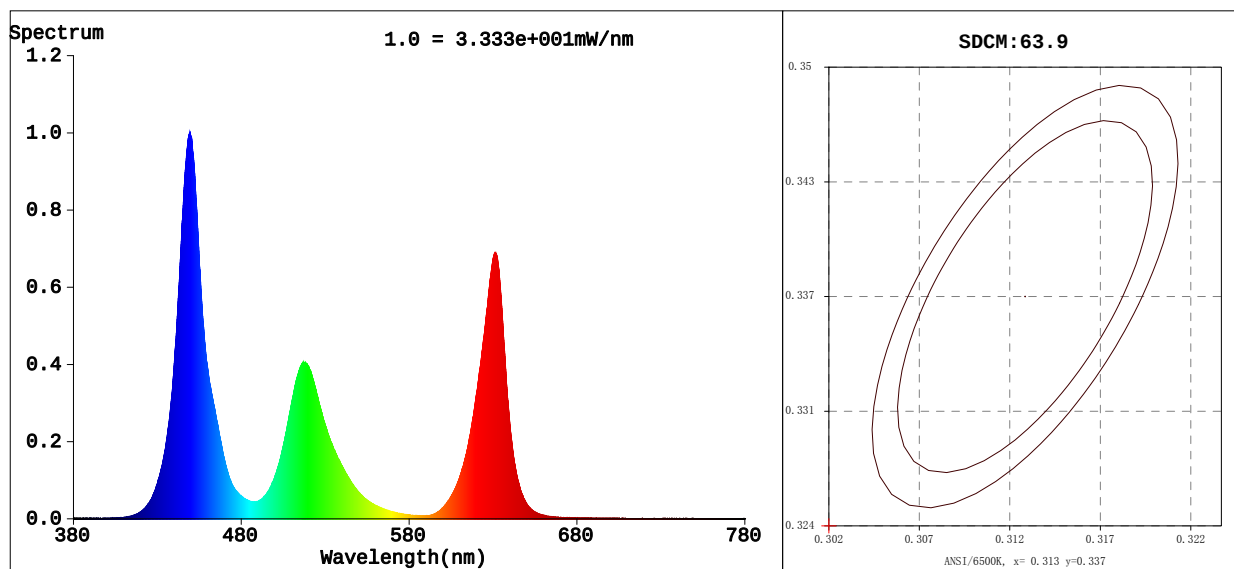

Colorimetric Parameters

Chromaticity Coordinate: $x=0.2619$ $y=0.2131$ $u'=0.2081$ $v'=0.3811$

CCT=100000K (Duv=-0.0300) Dominant WL:Ld =456.0nm Purity=38.9%

Peak WL:Lp=449.4nm FWHM=15.9nm

Render Index:Ra=28.6

R1 =0	R2 =58	R3 =49	R4 =0	R5 =16	R6 =56	R7 =50
R8 =0	R9 =0	R10=9	R11=0	R12=67	R13=5	R14=64 R15=0

Photometric & Radiometric Parameters

Flux=331.3 lm Eff.:26.54 lm/W Fe=1.626 W

Electrical parameters

V=24.00 V I=0.5202 A P=12.48 W PF=1.000 F=0.00 Hz

V=24.00 V I=0.5202 A P=12.48 W PF=1.000 F=0.00 Hz 频率=0.00 Hz

Status: Integral T = 171 ms Ip = 42852 (65%)

Test Mode: Fast Test; Sensitivity = High; Tecool: ON

Model:
Test By:ADMIN
Temperature:25.3Deg
Manufacturer:EVERFINE
Assessor:admin

Number:5
Date:2025-12-01 17:15:00
Humidity:65.0%
Remarks:---